

# ATESS PBD250



## LEADING - EDGE TECHNOLOGY

### Overview

1000V level DC to DC solar charge controller, used together with ATESS PCS and Bypass for large scale solar project

### Features



Multiple units paralleled



Up to 5 MPPT




Modular design



Transformerless design

### Block Diagram

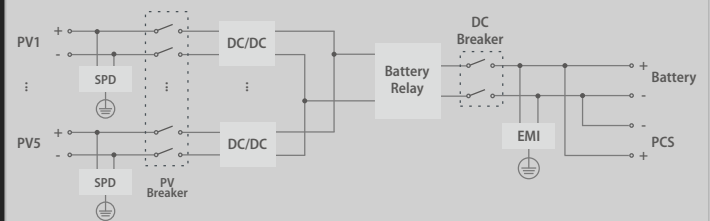

### Shenzhen Ateess Power Technology Co.,Ltd

1st Floor of Building 3 at Sector B and 3rd Floor of Building 9,Henglong Industrial Park, No.4 Industrial Zone, Shuitian Community, Shiyan Street, Baoan District, Shenzhen

# Datasheet

## ATESS PBD250

### Input (PV)

Recommended PV power	250kW
MPPT voltage range	350V-850V
Full load MPPT voltage range	480V-850V
Max. input current	575A(115A*5)
Number of MPPT	5

### Output (Battery and PCS)

Output voltage	600V-900V
Max. charge power	250kW
Max. charge current	416A
Max. charge efficiency	99%

### Protection

Input & output OV/UV protection	Yes
Input & output OC protection	Yes
Short circuit protection	Yes
Over temperature protection	Yes
Lightning protection	Type II
DC breaker	Yes
Emergency stop	Yes

### General Information

Protection degree	IP20
Noise emission	<65dB(A)@1m
Operating temperature	-25°C~+55°C
Cooling	Forced-air
Relative humidity	0-95% non-condensing
Maximum altitude	6000m (derate above 3000m)
Dimension (W/H/D)	850/1900/700mm
Weight	343kg
Topology	Transformerless
Standby power	<100W

### Communication

Display	Touch screen
Communication	RS485/CAN